Legacy West Condo Association

Full Reserve Study



Report Period - 1/1/2027 to 12/31/2027

Client Reference Number	10684
Property Type	Condominiums
Number of Units	176
Fiscal Year End	12/31

Type of Study	Update with Site Visit
Date of Site Visit	6/30/2026
Prepared By	Dylan Magnuson
NV Permit #	RSS.0289
Analysis Method	Cash Flow
Funding Goal	Full Funding

Report prepared on - Aug 19, 2026

Complex Solutions ltd
TEL: (702) 361-0111 | Fax: (702) 361-6685
www.ComplexSolutionsLtd.com

Table of Contents

Introduction

- Executive Summary Page 1
- Introduction Page 2
- General Information and Frequently Asked Questions Page 3

Reserve Analysis

- Funding Summary Page 6
- Percent Funded - Graph Page 7
- Component Funding Information Page 8
- Yearly Summary Page 10
- Reserve Contributions - Graph Page 11
- Significant Components Page 12
- Significant Components - Graph Page 14
- Yearly Cash Flow Page 15
- Yearly Reserve Expenditures - Graph Page 17
- Projected Reserve Expenditures by Year Page 18

Glossary of Commonly used Words and Phrases

- Glossary Page 23

Executive Summary - Legacy West Condo Association - ID # 10684

Information to complete this Update with Site Visit Study was gathered by performing an on-site visit of the common area elements. In addition, we may also have obtained information by contacting any vendors and/or contractors that have worked on the property recently, as well as communicating with the property representative (BOD Member and/or Community Manager). To the best of our knowledge, the conclusions and recommendations of this report are considered reliable and accurate insofar as the information obtained from these sources.

Projected Starting Balance as of 1/1/2027	**$431,494**
Ideal Reserve Balance as of 1/1/2027	**$937,334**
Percent Funded as of 1/1/2027	**46%**
Recommended Reserve Contribution (per month)	**$12,000**
Recommended Special Assessment (FY 2027)	**$0**

Property Details

Legacy West Condo Association is a 176-unit condominium community. The property offers a clubhouse with fitness room as well as a pool area as amenities. Construction on the community was completed in 1994.

Currently Programmed Projected

Projects programmed to occur this fiscal year (FY 2027) include: Concrete - Repair/Replace (Comp #403). Patio Decks - Reseal/Repair (Comp #603). Pool Deck - Seal/Paint/Repair (Comp #608). Water Heater - Replace (Comp #703). HVAC Systems - Replace (Comp #705). Mailboxes - Replace (Comp #803). We have programmed an estimated $140,212.50 in reserve expenditures toward the completion of these projects. (See Page(s) 18 - 22)

Significant Reserve Projects

The association's significant reserve projects include: Stucco Surfaces - Repaint (Comp #201). Asphalt - Major Rehab. (Comp #401). Asphalt - Preventative Maintenance (Comp #402). Trim Surfaces - Repaint (Comp #202). The fiscal significance of these components is approximately 15%, 10%, 8% and 7% respectively. A component's significance is calculated by dividing its replacement cost by its useful life. In this way, not only is a component's replacement cost considered but also the frequency of occurrence. These components most significantly contribute to the total monthly reserve contribution. As these components have a high level of fiscal significance the association should properly maintain them to ensure they reach their full useful lives. (See Page(s) 12) - 13

Reserve Funding

In comparing the projected starting reserve balance of $431,494.00 versus the ideal reserve balance of $937,333.64 we find the association's reserve fund to be approximately 46% funded. This indicates a fair reserve fund position. In order to continue to strengthen the account fund, we suggest adopting a monthly reserve contribution of $12,000.00 ($68.18/unit) per month. If the contribution falls below this rate, then the reserve fund may fall into a situation where special assessments, deferred maintenance, and lower property values are likely at some point in the future.

Starting Reserve Balance

The starting reserve balance was provided by the client and was not audited or verified.

Introduction

Reserve Study Purpose

The purpose of this Reserve Study is to provide the board with a budgeting tool to help ensure that there are adequate reserve funds available to perform future reserve projects. In this respect our estimates of the current and future Fully Funded balances are less significant than the recommended reserve contribution. The board should weigh carefully our recommendations when setting the Reserve Contribution. The detailed schedules will serve as an advanced warning that major projects will need to be addressed in the future. This will allow the Board of Directors to have ample time to obtain competitive estimates and bids that will result in cost savings to the individual homeowners. It will also ensure the physical well-being of the property and ultimately enhance each owner's investment, while limiting the possibility of unexpected major projects that may lead to special assessments.

Preparer's Credentials

This reserve study was prepared under the responsible charge of Dylan Magnuson.

All individuals who assisted in the preparation of this study possess the appropriate experience and training and are solely affiliated with Complex Solutions Ltd. and its subsidiaries.

Mr. Magnuson entered the reserve study industry in 2021. Since then, he has contributed to and worked on reserve studies nationwide, with a primary focus on Nevada, Northern California, and Maryland.

His experience spans a variety of projects, including single-family home communities, large master associations, condominium complexes, and high-rise towers.

Dylan is actively involved with several professional organizations, most notably the Community Associations Institute (CAI) and the Association of Professional Reserve Analysts (APRA). He has also completed numerous hours of training and trade education programs.

As a team member of Complex Solutions, Dylan has gained valuable expertise in utilizing proprietary software and databases to deliver highly accurate reserve studies and budgets, tailored to each client’s specific needs.

Dylan is privileged to hold the Nevada Reserve Study permit designation number RSS.0289

Budget Breakdown

Every association conducts their business within a budget. There are typically two main parts to this budget, the Operating budget and the Reserve budget. The operating budget typically includes all expenses that occur on an annual basis as well as general maintenance and repairs. Typical Operating budget line items include management fees, maintenance expenses, utilities, etc. The reserves are primarily made up of capital replacement items such as roofing, fencing, mechanical equipment, etc., that do not normally occur on an annual basis. Typically, the reserve contribution makes up 15% - 40% of the association's total budget. Therefore, reserves are considered to be a major part of the overall monthly association assessment.

Report Sections

The ***Reserve Analysis*** *Section* contains the evaluation of the association's reserve balance, income, and expenses. It includes a finding of the client's current reserve fund status (measured as percent funded) and a recommendation for an appropriate reserve allocation rate (also known as the funding plan).

The ***Component Evaluation*** *Section* contains information regarding the physical status and replacement cost of major common area components the association is responsible to maintain. It is important to understand that while the component inventory will remain relatively “stable” from year to year, the condition assessment and life estimates will most likely vary from year to year.

General Information and Frequently Asked Questions

Is it the law to have a Reserve Study conducted?

The Government requires reserve analyses in approximately 20 States. Even if it is not currently governed by your State, the chances are very good that the documents of the association require the association to have a reserve fund established. This doesn't mean a Reserve Study is required, but how are you going to know if you have enough funds in the reserve account if you don't have the proper information? Some associations look at the Reserve fund and think that $500,000 is a lot of money and they are in good shape. What they don't know is that the roof is going to need to be replaced within 5 years, and the cost of the roof is going to exceed $750,000. So while $500,000 sounds like a lot of money, in reality it won't even cover the cost of a roof, let alone all the other amenities the association is responsible to maintain.

Why is it important to perform a Reserve Study?

As previously mentioned, the reserve allocation makes up a significant portion of the total monthly assessment. This report provides the essential information that is needed to guide the Board of Directors in establishing the reserve portion of the total monthly assessment. The reserve fund is critical to the future of the association because it helps ensure that significant reserve projects can be completed on time with quality contractors. In this way deferred maintenance can be avoided as well as the lower property values that typically accompanies it. It is suggested that a third party professionally prepare the Reserve Study since there is no vested interest in the property.

After we have a Reserve Study completed, what do we do with it?

Hopefully, you will not look at this report and think it is too cumbersome to comprehend. Our intention is to make this Reserve Study easy to read and understand. Please take the time to review it carefully and make sure the “main ingredients” (component information) are complete and accurate. If there are any components that the association feels should be added, removed, or altered as well as any other inaccuracies or changes that should be made, please inform us immediately so we may revise the report. In order to ensure the Board understands its role in the completion of this report, all reports are labeled as “DRAFT” until their input has been given and the report has been approved as finalized. **Note to user:** If this report has a “DRAFT” watermark it is not a finalized report and is not to be relied upon or used for budgeting purposes.

Once you feel the report is an accurate tool to work from, use it to help establish your budget for the upcoming fiscal year. The reserve allocation makes up a large portion of the total monthly assessment and this report should help you determine the correct amount of money to go into the reserve fund. Additionally, the Reserve Study should act as a guide to obtain proposals in advance of pending projects. This will give you an opportunity to shop around for the best price available.

How often do we update or review the Reserve Study?

Unfortunately, there is a misconception that these reports are good for an extended period of time since the report has projections for the next 30 years. Just like any major line item in the budget, the Reserve Study should be professionally reviewed (Level III “no site visit” update study) each year before the budget is established. Invariably, some assumptions have to be made during the compilation of this analysis. Anticipated events may not materialize and unpredictable circumstances could occur. Deterioration rates and repair/replacement costs will vary from causes that are unforeseen. Earned interest rates may vary from year to year. These variations could alter the results of the Reserve Study. Because of this projected future Fully Funded balances cannot be relied upon (in other words the Fully Funded balance for the current year of a report prepared 3 years earlier cannot be considered accurate or reliable). Therefore, this analysis should be professionally reviewed annually, and a “site visit” reserve study should be conducted at least once every three years

What is a “Reserve Component” versus an “Operating Component”?

A “Reserve” component is an item that is the responsibility of the association to maintain, has a limited useful life, predictable remaining useful life, typically occurs on a cyclical basis that exceeds 1 year, and costs above a minimum threshold amount. An “Operating” expense is typically a fixed expense that occurs on an annual basis. For instance, minor repairs to a roof for damage caused by high winds or other weather elements would be considered an “Operating” expense. However, if the entire roof needs to be replaced because it has reached the end of its life expectancy, then the replacement would be considered a reserve expense.

What are the GREY areas of “maintenance” items that are often seen in a Reserve Study?

One of the most popular questions revolves around major “maintenance” items, such as painting the buildings or seal coating the asphalt. You may hear from your accountant that since painting or seal coating is not replacing a “capital” item, it cannot be considered a Reserve issue. However, it is the opinion of several major Reserve Study providers, including Complex Solutions ltd, that these items are considered to be major expenses that occur on a cyclical basis. Therefore, it makes it very difficult to ignore a major expense that meets the criteria to be considered a reserve component. Once explained in this context, many accountants tend to agree and will include any expenses, such as these examples, as a reserve component.

What are the GREY areas of major expenses that are not included in a Reserve Study?

Some components may appear to satisfy the requirements of being a reserve component but are still not included in the reserve study. Several Reserve Study providers, including Complex Solutions ltd, limit the component list to physical components of the common area that are owned by the association. Certain elements of an association's common area, such as leased items, or non-physical components such as future reserve studies, financial audits, inspection reports etc. are not included in our reserve studies. In addition we typically do not fund for utility systems, plumbing, or components with an extended useful life. Associations that feel any of these components should be included in our reserve study should notify us with their request. These components will be added to help the association better plan and prepare their own budget and will not necessarily reflect the professional opinions of Complex Solutions ltd.

Information and Data Gathered

It is important for the client, homeowners, and potential future homeowners to understand that the information contained in this analysis is based on estimates and assumptions gathered from various sources. Estimated life expectancies and cycles are based upon conditions that were readily visible and accessible at the time of the site visit. No destructive or intrusive methods (such as entering the walls to inspect the condition of electrical wiring, plumbing lines, and telephone wires) were performed. In addition, environmental hazards (such as lead paint, asbestos, radon, etc.), construction defects, and acts of nature have also been excluded from this report. If problem areas were revealed, a reasonable effort has been made to include these items within the report. While every effort has been made to ensure accurate results, this report reflects the judgment of Complex Solutions ltd and should not be construed as a guarantee or assurance of predicting future events.

What happens during the Site Visit? (Site Visit Studies Only)

The Site Visit was conducted of the common areas as reported by client. There may be certain areas that are not located inside the community but still a part of the association's common area. This may include drainage easements or landscaped areas located outside of the community, such as across a street. It is the responsibility of the Association to inform us of all common area locations. From our site visit we identified those common area components that we have determined require reserve funding. Based on information provided by the client, client's vendors, and our assessment of the components we have developed a component list and life and cost estimates.

What is the Financial Analysis?

We project the starting balance by taking the most recent reserve fund balance as stated by the client and add expected reserve contributions to the end of the fiscal year. We then subtract the expenses of any pending projects. We compare this number to the Fully Funded Balance and arrive at the Percent Funded level. Based on that level of funding we then recommend a Funding Plan to help ensure the adequacy of funding in the future

Percent Funded Breakdown: The percentage of the current reserve fund balance versus the Fully Funded Balance. A “snap-shot” indicator of the general strength of the account at the time of report preparation. Because many variables affect the Fully Funded balance it is more important to maintain the recommended reserve contribution or “cash flow” moving forward rather than striving to attain a certain Fully Funded figure.

Measures of strength are as follows:

0% - 30% Funded is generally considered to be a “weak” financial position. Associations that fall into this category are subject to higher frequencies of special assessments and deferred maintenance, which could lead to lower property values. Furthermore, should components fail sooner than expected our recommendations may not be enough to get the community into a better financial position. In this case additional actions beyond our initial recommendations may be necessary to improve the financial strength of the reserve fund.

31% - 69% Funded is generally considered a “fair” financial position. The majority of associations fall into this category. While this doesn't represent financial strength and stability, the likelihood of special assessments and deferred maintenance is diminished. Effort should be taken to continue strengthening the financial position of the reserve fund.

70% - 99% Funded is generally considered a “strong” financial position. This indicates financial strength of a reserve fund and every attempt to maintain this level should be a goal of the association.

100% Funded is considered an “ideal” financial position. This means that the association theoretically has the exact amount of funds in the reserve account.

100%+ Funded is considered over-funded. This means that the association has more reserve funds than the theoretically ideal amount.

Disclosures:

Information provided to the preparer of a reserve study by an official representative of the association regarding financial, historical, physical, quantitative or reserve project issues will be deemed reliable by the preparer. A reserve study will be a reflection of information provided to the preparer of the reserve study. The total of actual or projected reserves required as presented in the reserve study is based upon information provided that was not audited.

A reserve study is not intended to be used to perform an audit, an analysis of quality, a forensic study or a background check of historical records. A site visit conducted in conjunction with a reserve study should not be deemed to be a project audit or quality inspection.

The results of this study are based on the independent opinion of the preparer and his experience and research during the course of his career in preparing Reserve Studies. In addition any opinions of experts on certain components have been gathered through research within their industry and with client's actual vendors. There is no implied warrantee or guarantee regarding our life and cost estimates/predictions. There is no implied warrantee or guarantee in any of our work product. Our results and findings will vary from another preparer's results and findings. A Reserve Study is necessarily a work in progress and subsequent Reserve Studies will vary from prior studies.

Estimated life expectancies and life cycles are based upon conditions that were readily accessible and visible at the time of the site visit. We did not destroy any landscape work, building walls, or perform any methods of intrusive investigation during the site visit. In these cases, information may have been obtained by contacting the contractor or vendor that has worked on the property. The physical analysis performed during this site visit is not intended to be exhaustive in nature and may include representative sampling.

The projected life expectancy of the major components and the funding needs of the reserves of the association are based upon the association performing appropriate routine and preventative maintenance for each major component. Failure to perform such maintenance can negatively impact the remaining useful life of the major components and dramatically increase the funding needs of the reserves of the association.

This Reserve Study assumes that all construction assemblies and components identified herein are built properly and are free from defects in materials and/or workmanship. Defects can lead to reduced useful life and premature failure. It was not the intent of this Reserve Study to inspect for or to identify defects. If defects exist, repairs should be made so that the construction components and assemblies at the community reach their full and expected useful lives.

We have assumed any and all components have been properly built and will reach normal, typical life expectancies. In general a reserve study is not intended to identify or fund for construction defects. We did not and will not look for or identify construction defects during our site visit.

Site Visits: Should a site visit have been performed during the preparation of this reserve study no invasive testing was performed. The physical analysis performed during the site visit was not intended to be exhaustive in nature and may have included representative sampling.

Update Reserve Studies: Level II Studies: Quantities of major components as reported in previous reserve studies are deemed to be accurate and reliable. The reserve study relies upon the validity of previous reserve studies. **Level III Studies:** In addition to the above we have not visited the property when completing a Level III “No Site Visit” study. Therefore we have not verified the current condition of the common area components.

Insurance: We carry general and professional liability insurance as well as workers' compensation insurance.

Actual or Perceived Conflicts of Interest: Unless otherwise stated there are no potential actual or perceived conflicts of interest that we are aware of.

Inflation and Interest Rates: The after tax interest rate used in the financial analysis may or may not be based on the clients reported after tax interest rate. If it is we have not verified or audited the reported rate. The interest rate may also be based on an amount we believe appropriate given the 30-year horizon of this study and may or may not reflect current or historical inflation rates.

California Clients: CA Civil Code §5551 requires California condominium associations with 3 or more units to inspect all exterior elevated elements “that extend beyond the exterior walls of the building to deliver structural loads to the building from decks, balconies, stairways, walkways, and their railings, that have a walking surface elevated more than six feet above ground level, that are designed for human occupancy or use, and that are supported in whole or in substantial part by wood or wood-based products.” We have not determined if any exterior elevated element is required to be inspected pursuant to CA Civil Code §5551. Any funding for such inspections within this report is not a determination that your association is required to perform such inspection on any of the exterior elements. Further lack of funding for these inspection is not a determination that your association is not required to perform such inspections. We recommend contacting your association’s legal counsel for such a determination. Further we do not warrant that any such inspections have occurred and are not responsible for the findings of any such inspection. Should any such inspection recommend remediation or repairs we recommend those repairs be performed immediately as required whether or not they are funded for in this report. We will not/have not performed any inspections that would comply with CA Civil Code §5551 on your exterior elevated elements. This reserve study is a budgeting tool and nothing within this study should be construed as a requirement to perform any specific maintenance at any time or cost.

Funding Summary

Beginning Assumptions

# of units	176
Fiscal Year End	12/31
Budgeted Monthly Reserve Contribution	$10,000
Projected Starting Reserve Balance	$431,494
Ideal Starting Reserve Balance	$937,334

Economic Assumptions

Current Inflation Rate	4.00%
Reported After-Tax Interest Rate	1.50%

Current Reserve Status

Current Balance as a % of Ideal Balance	46%


Recommendations

Recommended Special Assessment (FY 2027)	$0
Recommended Monthly Reserve Contribution	$12,000
Per Unit	$68.18
Future Annual Increases	4.00%
For number of years:	5
Increases thereafter:	3.00%

Changes From Prior Year

Recommended Increase to Reserve Contribution	$2,000
as Percentage	20%

Percent Funded - Graph

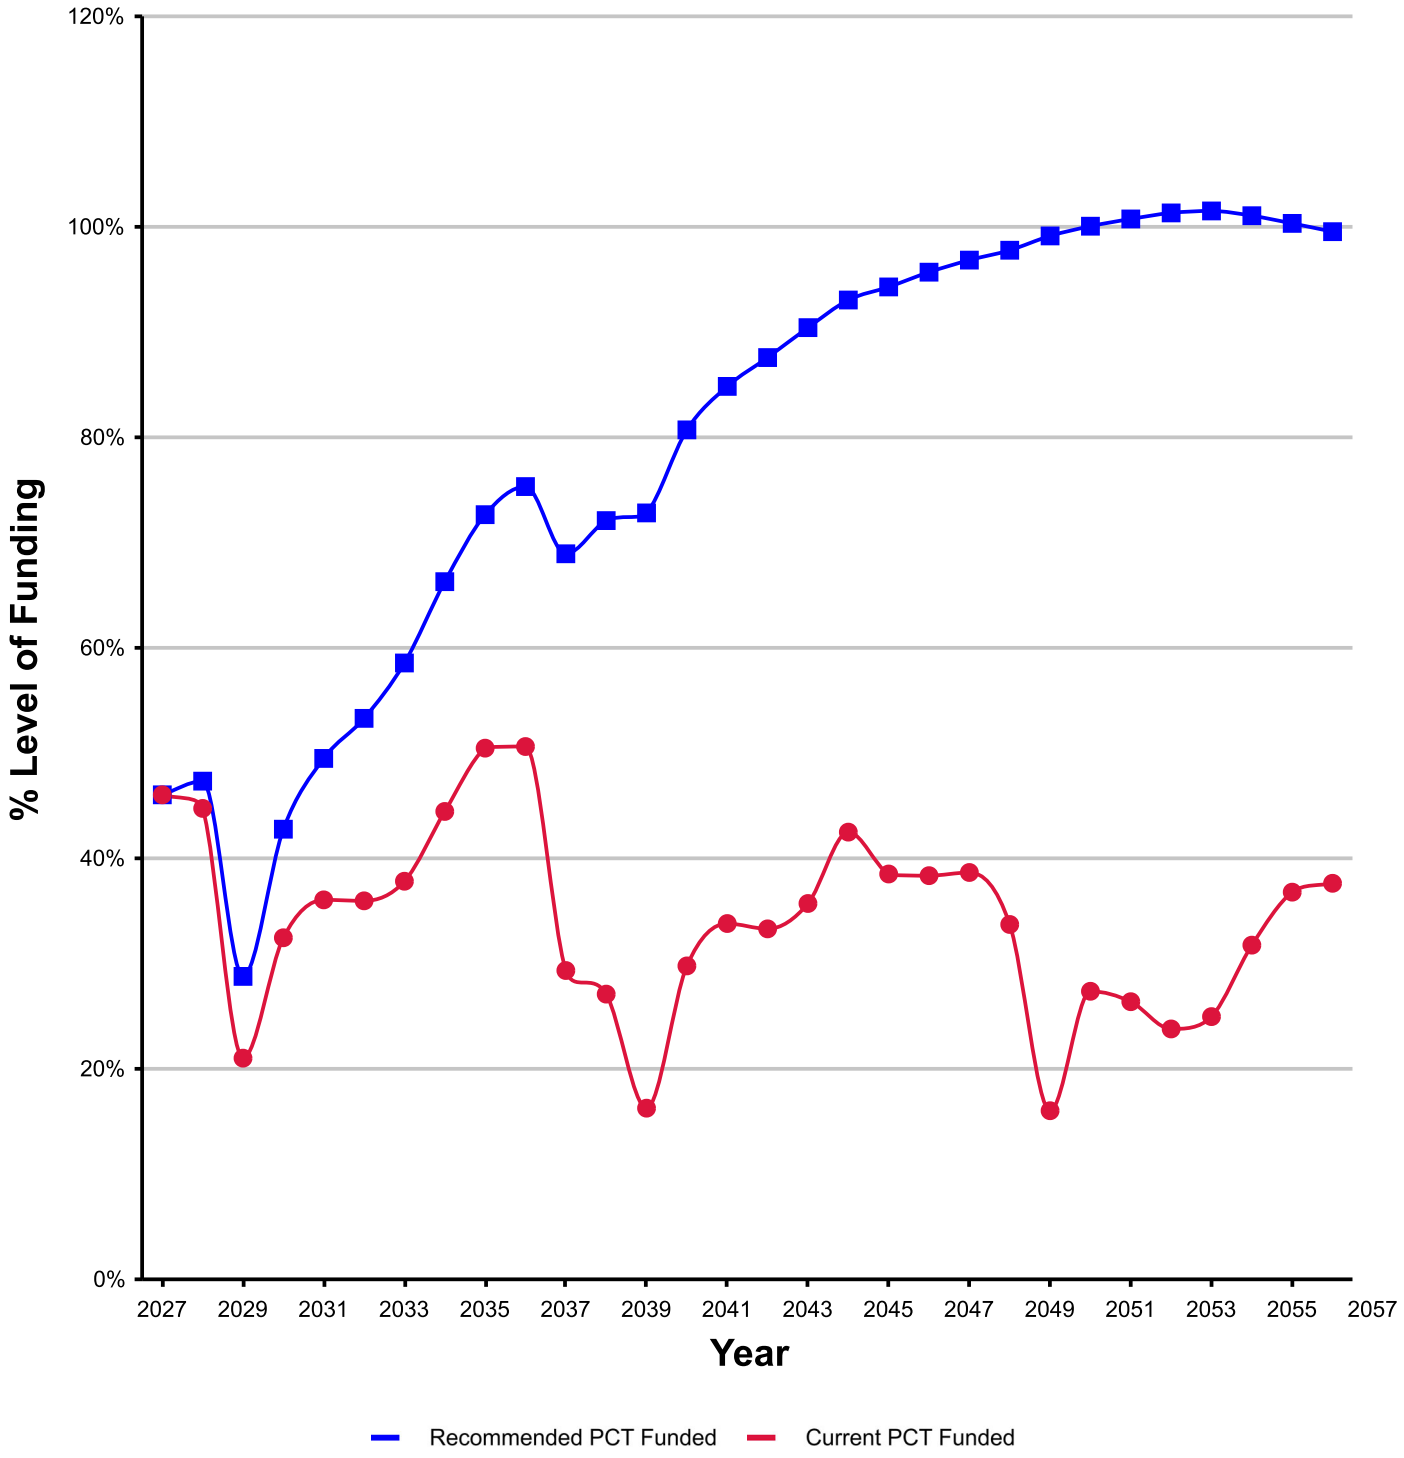

Component Funding Information

ID	Component Name	UL	RUL	Quantity	Average Current Cost	Ideal Balance	Current Fund Balance	Monthly
Common Area								
123	Carport Roofs - Repair	10	4	Approx 30,100 Sq.ft.	$10,150	$6,090	$0	$121.29
207	Wrought Iron Fencing - Repaint	5	3	Approx 8,950 Sq.ft.	$20,138	$8,055	$0	$481.28
208	Block Walls - Repaint	12	8	Approx 37,700 Sq.ft.	$32,988	$10,996	$0	$328.49
211	Street Light Fixtures - Repaint	5	3	(27) Poles	$3,038	$1,215	$0	$72.59
214	Red Curbs / Hydrants - Repaint	2	1	Allowance	$3,250	$1,625	$1,625	$194.18
223	Carports - Repaint	10	4	Approx 30,100 Sq.ft.	$18,813	$11,288	$0	$224.81
401	Asphalt - Major Rehab.	30	9	Approx 157,000 Sq.ft.	$294,375	$206,063	$0	$1,172.57
402	Asphalt - Preventative Maintenance	5	4	Approx 163,137 Sq.ft.	$40,788	$8,158	$0	$974.80
403	Concrete - Repair/Replace	10	0	Allowance	$6,500	$6,500	$6,500	$77.67
801	Monuments - Refurbish	20	5	(2) Monuments	$8,000	$6,000	$0	$47.80
802	Directory - Replace	6	3	(1) Map	$2,500	$1,250	$0	$49.79
1002	Wrought Iron Fencing - Partial Repair/Replace	10	5	Approx 8,950 Sq.ft.	$23,000	$11,500	$0	$274.85
1010	Trash Enclosures Gates - Replace	20	4	(5) 9 ft. Gates	$5,000	$4,000	$0	$29.87
1305	Gas Barbecues - Replace	7	2	(5) Barbecues	$7,500	$5,357	$0	$128.03
1306	Park Furniture - Replace	12	3	See General Notes	$10,000	$7,500	$0	$99.58
1609	Street Light Fixtures - Replace/Modify	25	18	(27) Fixtures	$12,825	$3,591	$0	$61.30
1812	Landscaping / Irrigation - Renovate	5	4	Allowance	$30,000	$6,000	$0	$716.99
				Subtotals:	**$528,863**	**$305,186**	**$8,125**	**$5,056**
Pool Area								
608	Pool Deck - Seal/Paint/Repair	5	0	Pool Deck / Feature Rocks	$3,500	$3,500	$3,500	$83.65
1101	Pool - Resurface	10	0	(1) Pool	$19,000	$19,000	$19,000	$227.05
1102	Spa - Resurface	5	0	(1) Spa	$6,000	$6,000	$6,000	$143.40
1104	Pool Heater - Replace	10	0	(1) Pool Heater	$5,000	$5,000	$5,000	$59.75
1105	Spa Heater - Replace	10	0	(1) Spa Heater	$5,000	$5,000	$5,000	$59.75
1107	Pool Filter - Replace	12	6	(1) Pool Filter	$2,000	$1,000	$0	$19.92
1108	Spa Filter - Replace	12	0	(1) Spa Filter	$2,000	$2,000	$2,000	$19.92
1110	Pool / Waterfall Pumps - Replace	3	2	(1) Pump every 3 years	$3,100	$1,033	$0	$123.48
1121	Pool Furniture - Replace	5	0	See General Notes	$8,000	$8,000	$8,000	$191.20
1190	Water Feature - Refurbish	25	0	(1) Water Feature	$12,000	$12,000	$12,000	$57.36
1304	Drinking Fountain - Replace	7	0	(1) Drinking Fountain	$1,250	$1,250	$1,250	$21.34
1390	Outdoor Shower - Re-Tile	18	6	(1) Shower	$4,000	$2,667	$0	$26.56

Component Funding Information


ID	Component Name	UL	RUL	Quantity	Average Current Cost	Ideal Balance	Current Fund Balance	Monthly
1604	Post Light Fixtures - Replace	15	6	(12) Fixtures	$3,900	$2,340	$0	$31.07
				Subtotals:	**$74,750**	**$68,790**	**$61,750**	**$1,064**
Clubhouse								
216	Interior Surfaces - Repaint	10	2	(1) Clubhouse	$3,500	$2,800	$0	$41.82
703	Water Heater - Replace	10	0	(1) Water Heater	$1,500	$1,500	$1,500	$17.92
705	HVAC Systems - Replace	18	0	(2) HVAC Units	$16,500	$16,500	$16,500	$109.54
803	Mailboxes - Replace	20	0	(5) Mailbox Parcels	$17,500	$17,500	$17,500	$104.56
803	Mailboxes - Replace (2022)	20	15	(1) Mailbox Parcels	$3,500	$875	$0	$20.91
1405	Furniture - Replace	10	0	Allowance	$10,500	$10,500	$10,500	$125.47
1406	Fitness Equipment - Replace	10	0	See General Notes	$13,000	$13,000	$13,000	$155.35
1413	Restrooms - Remodel	15	4	(2) Restrooms	$10,500	$7,700	$0	$83.65
1417	Kitchen - Remodel	20	6	(1) Kitchen	$12,000	$8,400	$0	$71.70
1501	Carpeting - Replace	15	1	Approx 1,000 Sq.ft.	$4,750	$4,433	$4,433	$37.84
				Subtotals:	**$93,250**	**$83,208**	**$63,433**	**$769**
Community Buildings								
102	Flat Roofs - Replace	25	17	Approx 51,150 Sq.ft.	$134,275	$42,968	$0	$641.82
106	Pitched Roofs - Tile - Replace	35	1	Approx 44,000 Sq.ft.	$154,000	$149,600	$149,600	$525.79
201	Stucco Surfaces - Repaint	10	1	(176) Units	$154,000	$138,600	$63,423	$1,840.27
202	Trim Surfaces - Repaint	5	3	(176) Units	$37,400	$14,960	$0	$893.84
603	Patio Decks - Reseal/Repair	5	0	Approx 7,975 Sq.ft.	$12,963	$12,963	$12,963	$309.80
805	Unit Number Signs - Replace (Include With Comp# 201)	N/A	0	(176) Units	$0	$0	$0	$0.00
901	Fire Protection System - Renovate	20	1	(11) Buildings	$76,000	$72,200	$72,200	$454.09
1001	Stairways - Repair	30	10	Approx 2,650 Linear ft.	$34,788	$23,192	$0	$138.57
1601	Area Light Fixtures - Replace	18	11	(66) Fixtures	$23,100	$8,983	$0	$153.36
1602	Exterior Decorative Light Fixtures - Replace	18	5	(132) Fixtures	$23,100	$16,683	$0	$153.36
				Subtotals:	**$649,625**	**$480,149**	**$298,186**	**$5,111**
				Grand Total:	**$1,346,488**	**$937,334**	**$431,494**	**$12,000**

Current Fund Balance as a percentage of Ideal Balance: 46%

Yearly Summary

Year	Beginning Fully Funded Balance	Beginning Reserve Balance	Beginning % Funded	Reserve Contributions	Interest Income	Reserve Expenses	Ending Reserve Balance	Ending Fully Funded Balance
2027	$937,334	$431,494	46%	$144,000	$6,546	$140,213	$441,827	$933,443
2028	$933,443	$441,827	47%	$149,760	$4,725	$407,680	$188,633	$655,408
2029	$655,408	$188,633	29%	$155,750	$3,910	$15,251	$333,042	$778,723
2030	$778,723	$333,042	43%	$161,980	$5,605	$85,855	$414,773	$838,060
2031	$838,060	$414,773	49%	$168,460	$6,519	$134,826	$454,925	$853,539
2032	$853,539	$454,925	53%	$175,198	$7,359	$110,609	$526,872	$899,711
2033	$899,711	$526,872	59%	$180,454	$9,111	$27,710	$688,727	$1,039,027
2034	$1,039,027	$688,727	66%	$185,868	$11,761	$5,922	$880,434	$1,211,861
2035	$1,211,861	$880,434	73%	$191,444	$13,744	$132,289	$953,333	$1,265,684
2036	$1,265,684	$953,333	75%	$197,187	$11,820	$538,599	$623,741	$904,815
2037	$904,815	$623,741	69%	$203,103	$9,549	$186,141	$650,252	$902,013
2038	$902,013	$650,252	72%	$209,196	$9,268	$282,413	$586,303	$805,160
2039	$805,160	$586,303	73%	$215,471	$10,416	$8,806	$803,384	$995,416
2040	$995,416	$803,384	81%	$221,936	$13,007	$106,273	$932,054	$1,098,604
2041	$1,098,604	$932,054	85%	$228,594	$14,442	$180,268	$994,823	$1,135,921
2042	$1,135,921	$994,823	88%	$235,451	$15,815	$130,951	$1,115,137	$1,233,253
2043	$1,233,253	$1,115,137	90%	$242,515	$18,501	$22,944	$1,353,209	$1,454,330
2044	$1,454,330	$1,353,209	93%	$249,790	$20,256	$273,924	$1,349,332	$1,431,056
2045	$1,431,056	$1,349,332	94%	$257,284	$20,917	$186,173	$1,441,361	$1,506,249
2046	$1,506,249	$1,441,361	96%	$265,003	$22,426	$178,108	$1,550,681	$1,601,300
2047	$1,601,300	$1,550,681	97%	$272,953	$23,090	$316,727	$1,529,998	$1,564,790
2048	$1,564,790	$1,529,998	98%	$281,141	$21,086	$548,955	$1,283,270	$1,294,456
2049	$1,294,456	$1,283,270	99%	$289,576	$21,506	$8,295	$1,586,057	$1,585,115
2050	$1,585,115	$1,586,057	100%	$298,263	$24,392	$240,371	$1,668,341	$1,655,941
2051	$1,655,941	$1,668,341	101%	$307,211	$25,374	$283,886	$1,717,039	$1,694,641
2052	$1,694,641	$1,717,039	101%	$316,427	$26,779	$204,503	$1,855,742	$1,828,155
2053	$1,828,155	$1,855,742	102%	$325,920	$30,173	$41,864	$2,169,971	$2,147,291
2054	$2,147,291	$2,169,971	101%	$335,698	$34,966	$45,413	$2,495,222	$2,487,083
2055	$2,487,083	$2,495,222	100%	$345,768	$38,898	$185,395	$2,694,494	$2,706,931
2056	$2,706,931	$2,694,494	100%	$356,141	$41,025	$312,606	$2,779,054	END

Reserve Contributions - Graph

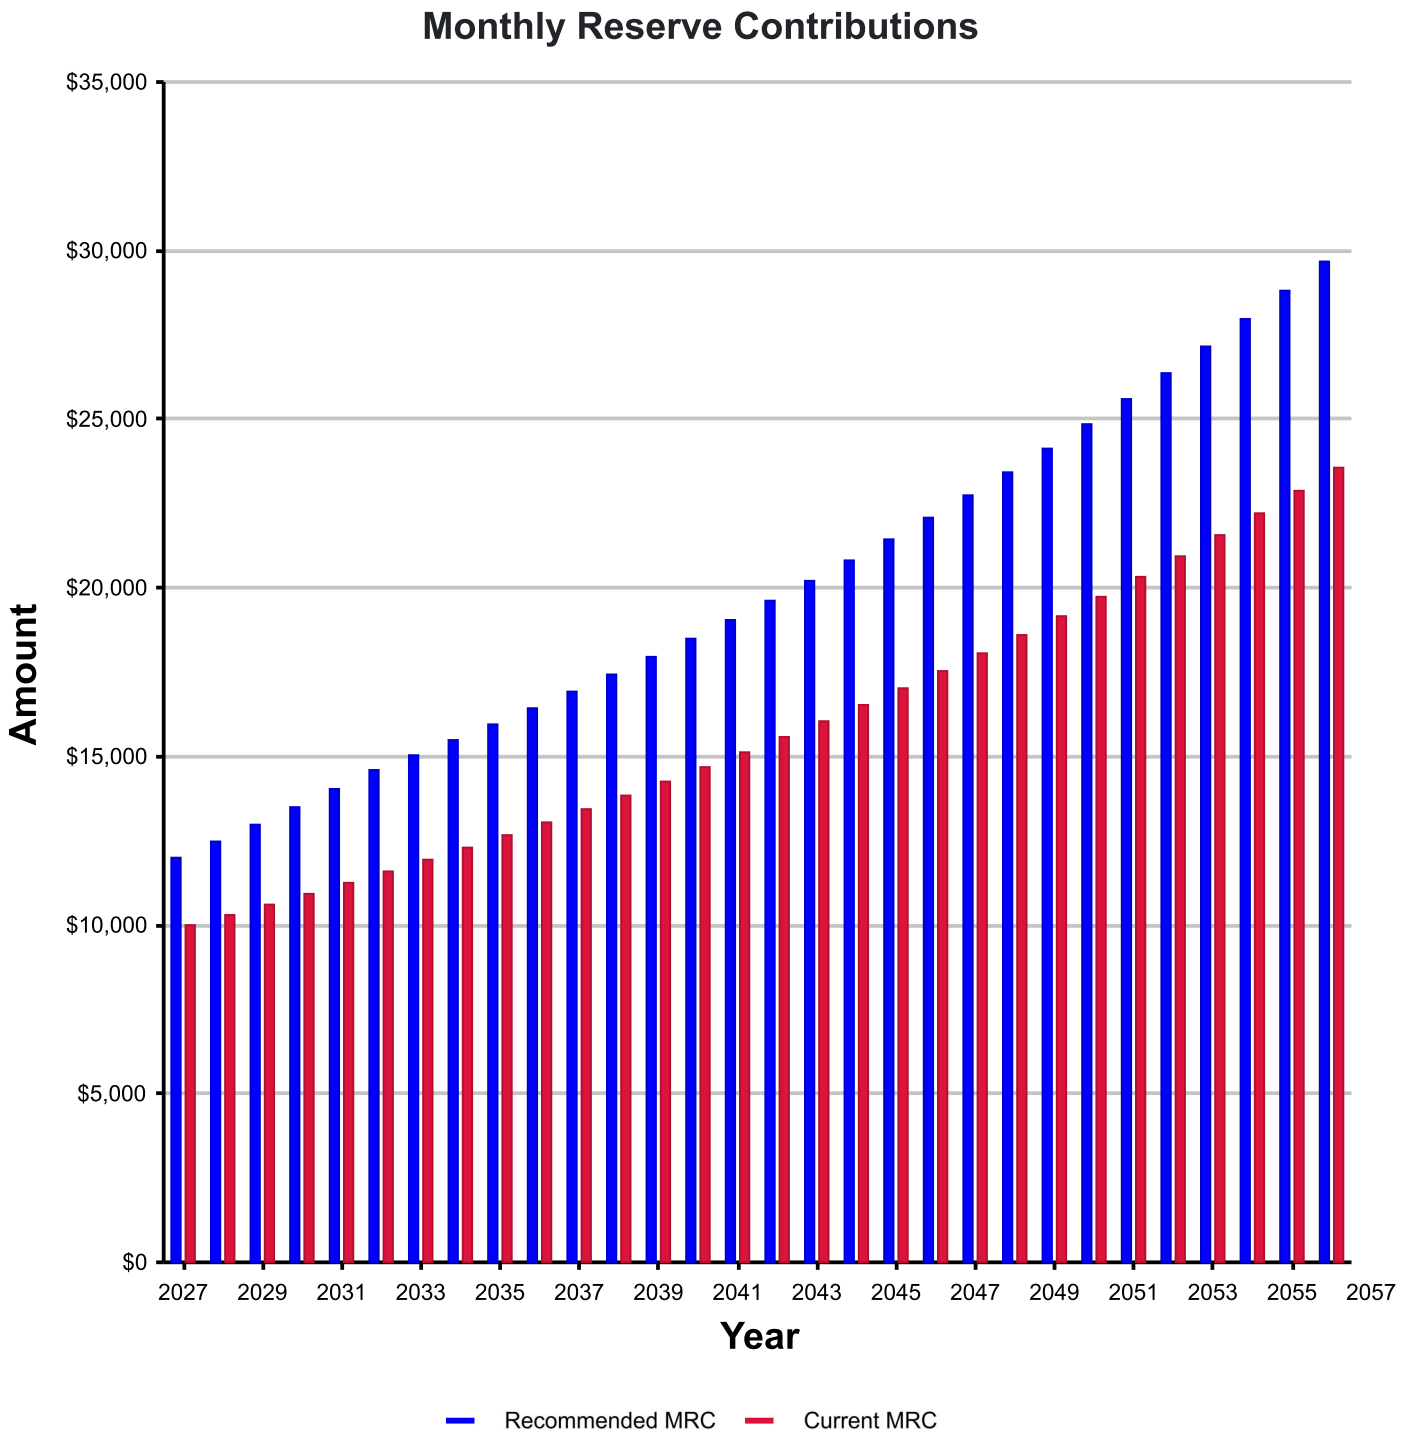


Significant Components

ID #	Component Name	UL	RUL	Average Current	Significance: (Curr Cost/UL) As $	As %
Common Area						
123	Carport Roofs - Repair	10	4	$10,150	$1,015	1.01%
207	Wrought Iron Fencing - Repaint	5	3	$20,138	$4,028	4.01%
208	Block Walls - Repaint	12	8	$32,988	$2,749	2.74%
211	Street Light Fixtures - Repaint	5	3	$3,038	$608	0.60%
214	Red Curbs / Hydrants - Repaint	2	1	$3,250	$1,625	1.62%
223	Carports - Repaint	10	4	$18,813	$1,881	1.87%
401	Asphalt - Major Rehab.	30	9	$294,375	$9,813	9.77%
402	Asphalt - Preventative Maintenance	5	4	$40,788	$8,158	8.12%
403	Concrete - Repair/Replace	10	0	$6,500	$650	0.65%
801	Monuments - Refurbish	20	5	$8,000	$400	0.40%
802	Directory - Replace	6	3	$2,500	$417	0.41%
1002	Wrought Iron Fencing - Partial Repair/Replace	10	5	$23,000	$2,300	2.29%
1010	Trash Enclosures Gates - Replace	20	4	$5,000	$250	0.25%
1305	Gas Barbecues - Replace	7	2	$7,500	$1,071	1.07%
1306	Park Furniture - Replace	12	3	$10,000	$833	0.83%
1609	Street Light Fixtures - Replace/Modify	25	18	$12,825	$513	0.51%
1812	Landscaping / Irrigation - Renovate	5	4	$30,000	$6,000	5.97%
Pool Area						
608	Pool Deck - Seal/Paint/Repair	5	0	$3,500	$700	0.70%
1101	Pool - Resurface	10	0	$19,000	$1,900	1.89%
1102	Spa - Resurface	5	0	$6,000	$1,200	1.19%
1104	Pool Heater - Replace	10	0	$5,000	$500	0.50%
1105	Spa Heater - Replace	10	0	$5,000	$500	0.50%
1107	Pool Filter - Replace	12	6	$2,000	$167	0.17%
1108	Spa Filter - Replace	12	0	$2,000	$167	0.17%
1110	Pool / Waterfall Pumps - Replace	3	2	$3,100	$1,033	1.03%
1121	Pool Furniture - Replace	5	0	$8,000	$1,600	1.59%
1190	Water Feature - Refurbish	25	0	$12,000	$480	0.48%
1304	Drinking Fountain - Replace	7	0	$1,250	$179	0.18%
1390	Outdoor Shower - Re-Tile	18	6	$4,000	$222	0.22%
1604	Post Light Fixtures - Replace	15	6	$3,900	$260	0.26%

Significant Components

ID #	Component Name	UL	RUL	Average Current	Significance: (Curr Cost/UL) As $	As %
Clubhouse						
216	Interior Surfaces - Repaint	10	2	$3,500	$350	0.35%
703	Water Heater - Replace	10	0	$1,500	$150	0.15%
705	HVAC Systems - Replace	18	0	$16,500	$917	0.91%
803	Mailboxes - Replace	20	0	$17,500	$875	0.87%
803	Mailboxes - Replace (2022)	20	15	$3,500	$175	0.17%
1405	Furniture - Replace	10	0	$10,500	$1,050	1.05%
1406	Fitness Equipment - Replace	10	0	$13,000	$1,300	1.29%
1413	Restrooms - Remodel	15	4	$10,500	$700	0.70%
1417	Kitchen - Remodel	20	6	$12,000	$600	0.60%
1501	Carpeting - Replace	15	1	$4,750	$317	0.32%
Community Buildings						
102	Flat Roofs - Replace	25	17	$134,275	$5,371	5.35%
106	Pitched Roofs - Tile - Replace	35	1	$154,000	$4,400	4.38%
201	Stucco Surfaces - Repaint	10	1	$154,000	$15,400	15.34%
202	Trim Surfaces - Repaint	5	3	$37,400	$7,480	7.45%
603	Patio Decks - Reseal/Repair	5	0	$12,963	$2,593	2.58%
805	Unit Number Signs - Replace (Include With Comp# 201)	N/A	0	$0	$0	0.00%
901	Fire Protection System - Renovate	20	1	$76,000	$3,800	3.78%
1001	Stairways - Repair	30	10	$34,788	$1,160	1.15%
1601	Area Light Fixtures - Replace	18	11	$23,100	$1,283	1.28%
1602	Exterior Decorative Light Fixtures - Replace	18	5	$23,100	$1,283	1.28%

Significant Components - Graph

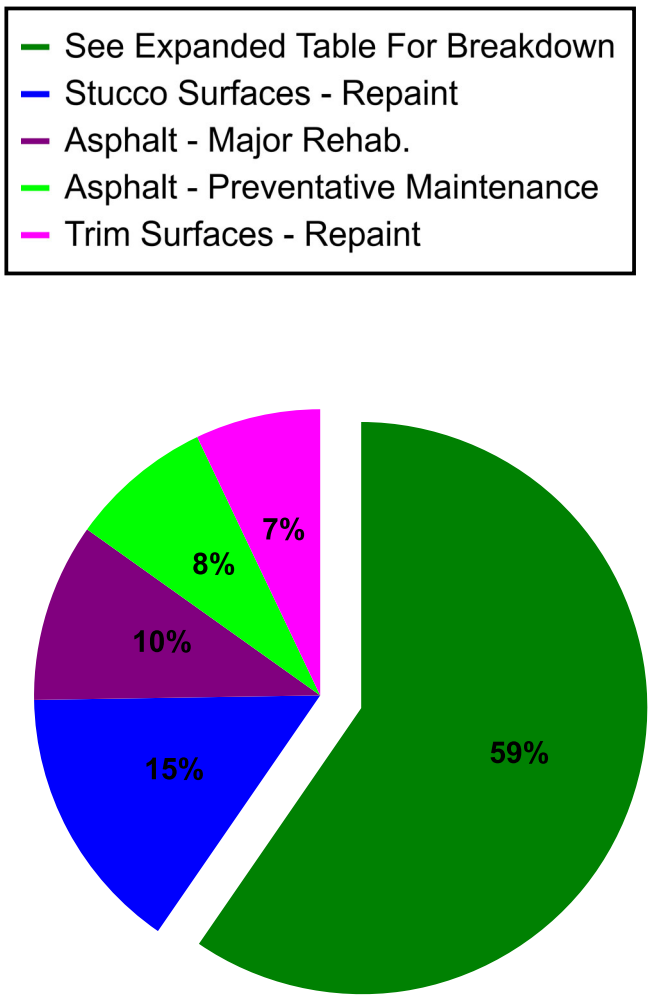

ID #	Component Name	Useful Life (yrs.)	Remaining Useful Life (yrs.)	Average Current	Significance: (Curr Cost/UL) AS	%
201	Stucco Surfaces - Repaint	10	1	$154,000	$15,400	15%
401	Asphalt - Major Rehab.	30	9	$294,375	$9,813	10%
402	Asphalt - Preventative Maintenance	5	4	$40,788	$8,158	8%
202	Trim Surfaces - Repaint	5	3	$37,400	$7,480	7%
All Other	See Expanded Table For Breakdown				$40,850	59%

Yearly Cash Flow

Year	2027	2028	2029	2030	2031
Starting Balance	$431,494	$441,827	$188,633	$333,042	$414,773
Reserve Income	$144,000	$149,760	$155,750	$161,980	$168,460
Interest Earnings	$6,546	$4,725	$3,910	$5,605	$6,519
Special Assessments	$0	$0	$0	$0	$0
Funds Available	$582,040	$596,312	$348,293	$500,627	$589,752
Reserve Expenditures	$140,213	$407,680	$15,251	$85,855	$134,826
Ending Balance	$441,827	$188,633	$333,042	$414,773	$454,925

Year	2032	2033	2034	2035	2036
Starting Balance	$454,925	$526,872	$688,727	$880,434	$953,333
Reserve Income	$175,198	$180,454	$185,868	$191,444	$197,187
Interest Earnings	$7,359	$9,111	$11,761	$13,744	$11,820
Special Assessments	$0	$0	$0	$0	$0
Funds Available	$637,482	$716,437	$886,356	$1,085,622	$1,162,340
Reserve Expenditures	$110,609	$27,710	$5,922	$132,289	$538,599
Ending Balance	$526,872	$688,727	$880,434	$953,333	$623,741

Year	2037	2038	2039	2040	2041
Starting Balance	$623,741	$650,252	$586,303	$803,384	$932,054
Reserve Income	$203,103	$209,196	$215,471	$221,936	$228,594
Interest Earnings	$9,549	$9,268	$10,416	$13,007	$14,442
Special Assessments	$0	$0	$0	$0	$0
Funds Available	$836,393	$868,716	$812,190	$1,038,327	$1,175,090
Reserve Expenditures	$186,141	$282,413	$8,806	$106,273	$180,268
Ending Balance	$650,252	$586,303	$803,384	$932,054	$994,823


Year	2042	2043	2044	2045	2046
Starting Balance	$994,823	$1,115,137	$1,353,209	$1,349,332	$1,441,361
Reserve Income	$235,451	$242,515	$249,790	$257,284	$265,003
Interest Earnings	$15,815	$18,501	$20,256	$20,917	$22,426
Special Assessments	$0	$0	$0	$0	$0
Funds Available	$1,246,089	$1,376,153	$1,623,255	$1,627,533	$1,728,790
Reserve Expenditures	$130,951	$22,944	$273,924	$186,173	$178,108
Ending Balance	$1,115,137	$1,353,209	$1,349,332	$1,441,361	$1,550,681

Year	2047	2048	2049	2050	2051
Starting Balance	$1,550,681	$1,529,998	$1,283,270	$1,586,057	$1,668,341
Reserve Income	$272,953	$281,141	$289,576	$298,263	$307,211
Interest Earnings	$23,090	$21,086	$21,506	$24,392	$25,374
Special Assessments	$0	$0	$0	$0	$0
Funds Available	$1,846,724	$1,832,225	$1,594,352	$1,908,712	$2,000,926
Reserve Expenditures	$316,727	$548,955	$8,295	$240,371	$283,886
Ending Balance	$1,529,998	$1,283,270	$1,586,057	$1,668,341	$1,717,039

Yearly Cash Flow

Year	2052	2053	2054	2055	2056
Starting Balance	$1,717,039	$1,855,742	$2,169,971	$2,495,222	$2,694,494
Reserve Income	$316,427	$325,920	$335,698	$345,768	$356,141
Interest Earnings	$26,779	$30,173	$34,966	$38,898	$41,025
Special Assessments	$0	$0	$0	$0	$0
Funds Available	$2,060,245	$2,211,835	$2,540,635	$2,879,888	$3,091,660
Reserve Expenditures	$204,503	$41,864	$45,413	$185,395	$312,606
Ending Balance	$1,855,742	$2,169,971	$2,495,222	$2,694,494	$2,779,054

Yearly Reserve Expenditures - Graph

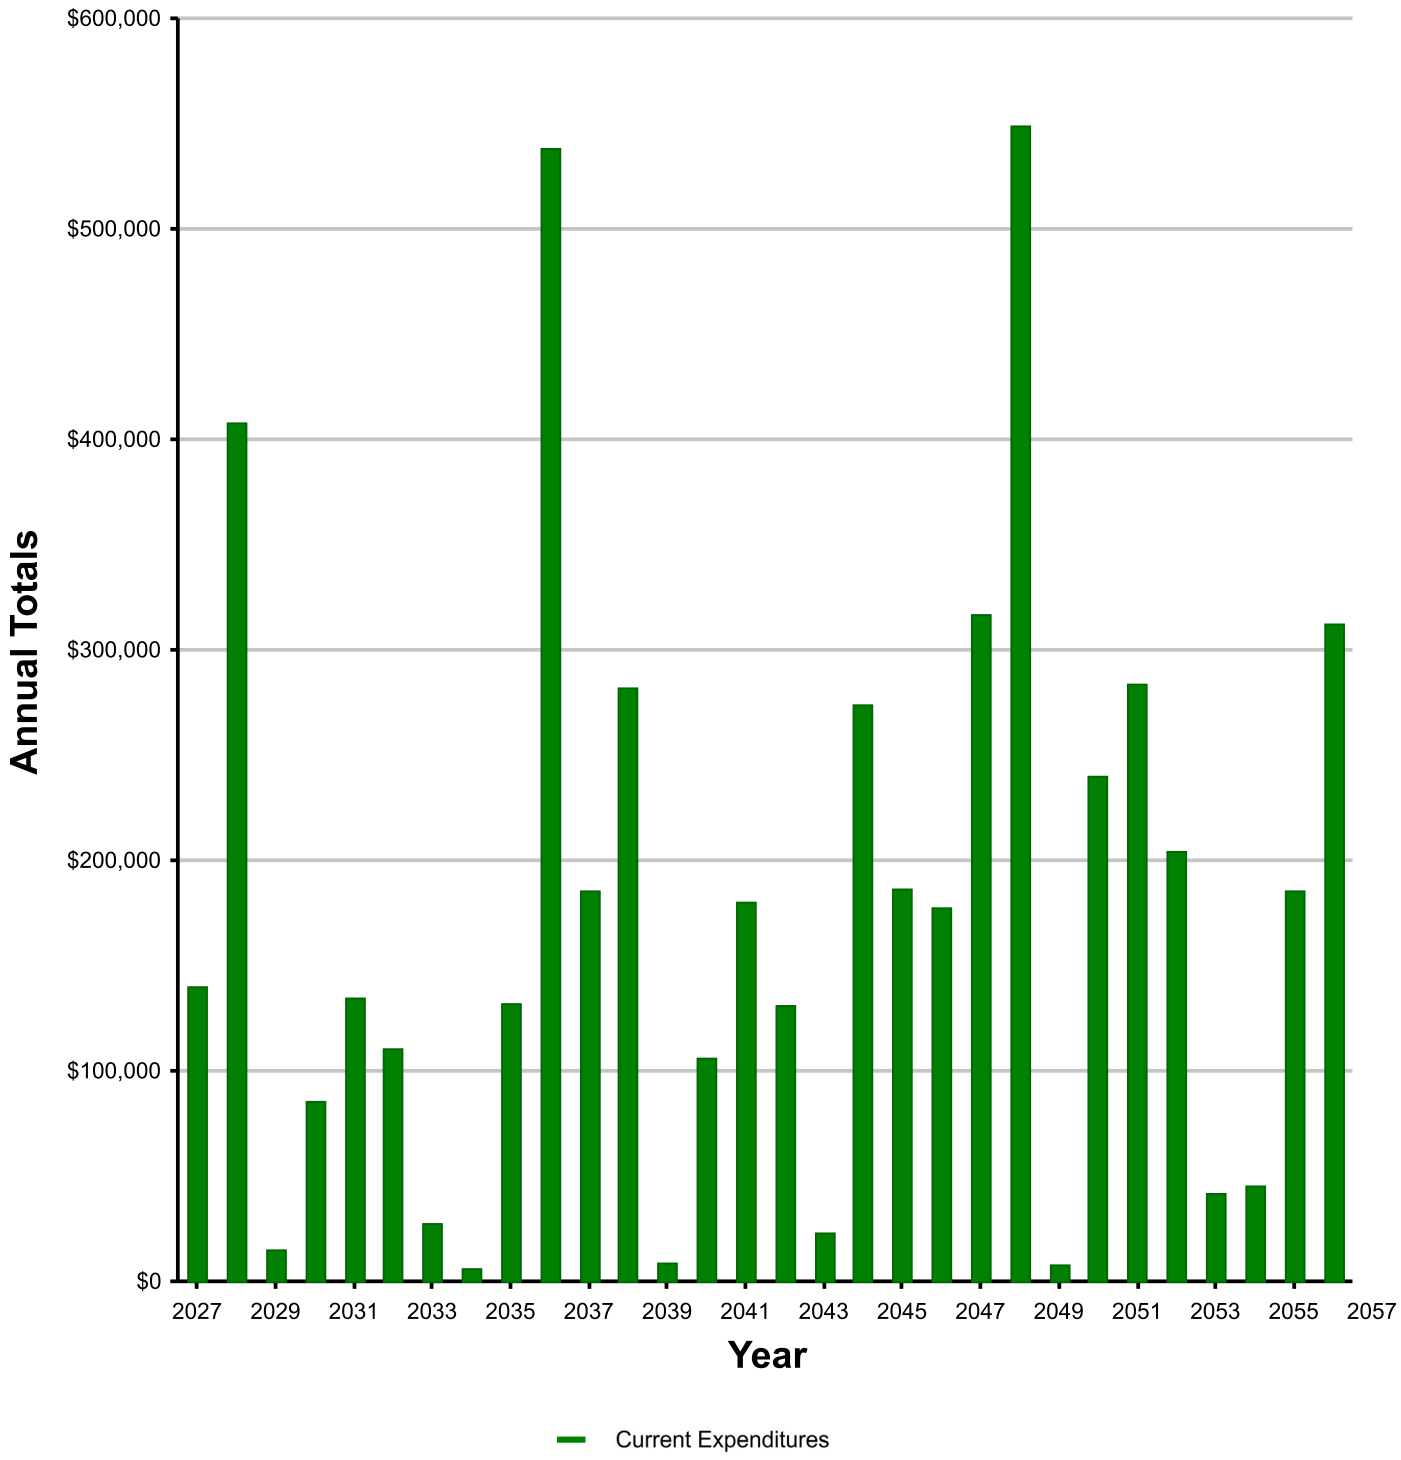

Projected Expenditures By Year

Year	Subgroup	Comp. Id	Component Name	Projected Cost	Total Per Annum
2027	Common Area	403	Concrete - Repair/Replace	$6,500	
	Community Buildings	603	Patio Decks - Reseal/Repair	$12,963	
	Pool Area	608	Pool Deck - Seal/Paint/Repair	$3,500	
	Clubhouse	703	Water Heater - Replace	$1,500	
	Clubhouse	705	HVAC Systems - Replace	$16,500	
	Clubhouse	803	Mailboxes - Replace	$17,500	
	Pool Area	1101	Pool - Resurface	$19,000	
	Pool Area	1102	Spa - Resurface	$6,000	
	Pool Area	1104	Pool Heater - Replace	$5,000	
	Pool Area	1105	Spa Heater - Replace	$5,000	
	Pool Area	1108	Spa Filter - Replace	$2,000	
	Pool Area	1121	Pool Furniture - Replace	$8,000	
	Pool Area	1190	Water Feature - Refurbish	$12,000	
	Pool Area	1304	Drinking Fountain - Replace	$1,250	
	Clubhouse	1405	Furniture - Replace	$10,500	
	Clubhouse	1406	Fitness Equipment - Replace	$13,000	$140,213
2028	Community Buildings	106	Pitched Roofs - Tile - Replace	$160,160	
	Community Buildings	201	Stucco Surfaces - Repaint	$160,160	
	Common Area	214	Red Curbs / Hydrants - Repaint	$3,380	
	Community Buildings	901	Fire Protection System - Renovate	$79,040	
	Clubhouse	1501	Carpeting - Replace	$4,940	$407,680
2029	Clubhouse	216	Interior Surfaces - Repaint	$3,786	
	Pool Area	1110	Pool / Waterfall Pumps - Replace	$3,353	
	Common Area	1305	Gas Barbecues - Replace	$8,112	$15,251
2030	Community Buildings	202	Trim Surfaces - Repaint	$42,070	
	Common Area	207	Wrought Iron Fencing - Repaint	$22,652	
	Common Area	211	Street Light Fixtures - Repaint	$3,417	
	Common Area	214	Red Curbs / Hydrants - Repaint	$3,656	
	Common Area	802	Directory - Replace	$2,812	
	Common Area	1306	Park Furniture - Replace	$11,249	$85,855
2031	Common Area	123	Carport Roofs - Repair	$11,874	
	Common Area	223	Carports - Repaint	$22,008	
	Common Area	402	Asphalt - Preventative Maintenance	$47,716	
	Common Area	1010	Trash Enclosures Gates - Replace	$5,849	
	Clubhouse	1413	Restrooms - Remodel	$12,284	
	Common Area	1812	Landscaping / Irrigation - Renovate	$35,096	$134,826
2032	Common Area	214	Red Curbs / Hydrants - Repaint	$3,954	
	Community Buildings	603	Patio Decks - Reseal/Repair	$15,771	
	Pool Area	608	Pool Deck - Seal/Paint/Repair	$4,258	
	Common Area	801	Monuments - Refurbish	$9,733	
	Common Area	1002	Wrought Iron Fencing - Partial Repair/Replace	$27,983	
	Pool Area	1102	Spa - Resurface	$7,300	

Projected Expenditures By Year

Year	Subgroup	Comp. Id	Component Name	Projected Cost	Total Per Annum
	Pool Area	1110	Pool / Waterfall Pumps - Replace	$3,772	
	Pool Area	1121	Pool Furniture - Replace	$9,733	
	Community Buildings	1602	Exterior Decorative Light Fixtures - Replace	$28,105	$110,609
2033	Pool Area	1107	Pool Filter - Replace	$2,531	
	Pool Area	1390	Outdoor Shower - Re-Tile	$5,061	
	Clubhouse	1417	Kitchen - Remodel	$15,184	
	Pool Area	1604	Post Light Fixtures - Replace	$4,935	$27,710
2034	Common Area	214	Red Curbs / Hydrants - Repaint	$4,277	
	Pool Area	1304	Drinking Fountain - Replace	$1,645	$5,922
2035	Community Buildings	202	Trim Surfaces - Repaint	$51,184	
	Common Area	207	Wrought Iron Fencing - Repaint	$27,560	
	Common Area	208	Block Walls - Repaint	$45,146	
	Common Area	211	Street Light Fixtures - Repaint	$4,157	
	Pool Area	1110	Pool / Waterfall Pumps - Replace	$4,243	$132,289
2036	Common Area	214	Red Curbs / Hydrants - Repaint	$4,626	
	Common Area	401	Asphalt - Major Rehab.	$418,987	
	Common Area	402	Asphalt - Preventative Maintenance	$58,053	
	Common Area	802	Directory - Replace	$3,558	
	Common Area	1305	Gas Barbecues - Replace	$10,675	
	Common Area	1812	Landscaping / Irrigation - Renovate	$42,699	$538,599
2037	Common Area	403	Concrete - Repair/Replace	$9,622	
	Community Buildings	603	Patio Decks - Reseal/Repair	$19,188	
	Pool Area	608	Pool Deck - Seal/Paint/Repair	$5,181	
	Clubhouse	703	Water Heater - Replace	$2,220	
	Community Buildings	1001	Stairways - Repair	$51,494	
	Pool Area	1101	Pool - Resurface	$28,125	
	Pool Area	1102	Spa - Resurface	$8,881	
	Pool Area	1104	Pool Heater - Replace	$7,401	
	Pool Area	1105	Spa Heater - Replace	$7,401	
	Pool Area	1121	Pool Furniture - Replace	$11,842	
	Clubhouse	1405	Furniture - Replace	$15,543	
	Clubhouse	1406	Fitness Equipment - Replace	$19,243	$186,141
2038	Community Buildings	201	Stucco Surfaces - Repaint	$237,076	
	Common Area	214	Red Curbs / Hydrants - Repaint	$5,003	
	Pool Area	1110	Pool / Waterfall Pumps - Replace	$4,772	
	Community Buildings	1601	Area Light Fixtures - Replace	$35,561	$282,413
2039	Clubhouse	216	Interior Surfaces - Repaint	$5,604	
	Pool Area	1108	Spa Filter - Replace	$3,202	$8,806
2040	Community Buildings	202	Trim Surfaces - Repaint	$62,274	
	Common Area	207	Wrought Iron Fencing - Repaint	$33,530	
	Common Area	211	Street Light Fixtures - Repaint	$5,058	
	Common Area	214	Red Curbs / Hydrants - Repaint	$5,411	$106,273

Projected Expenditures By Year

Year	Subgroup	Comp. Id	Component Name	Projected Cost	Total Per Annum
2041	Common Area	123	Carport Roofs - Repair	$17,577	
	Common Area	223	Carports - Repaint	$32,577	
	Common Area	402	Asphalt - Preventative Maintenance	$70,631	
	Pool Area	1110	Pool / Waterfall Pumps - Replace	$5,368	
	Pool Area	1304	Drinking Fountain - Replace	$2,165	
	Common Area	1812	Landscaping / Irrigation - Renovate	$51,950	$180,268
2042	Common Area	214	Red Curbs / Hydrants - Repaint	$5,853	
	Community Buildings	603	Patio Decks - Reseal/Repair	$23,345	
	Pool Area	608	Pool Deck - Seal/Paint/Repair	$6,303	
	Common Area	802	Directory - Replace	$4,502	
	Clubhouse	803	Mailboxes - Replace (2022)	$6,303	
	Common Area	1002	Wrought Iron Fencing - Partial Repair/Replace	$41,422	
	Pool Area	1102	Spa - Resurface	$10,806	
	Pool Area	1121	Pool Furniture - Replace	$14,408	
	Common Area	1306	Park Furniture - Replace	$18,009	$130,951
2043	Common Area	1305	Gas Barbecues - Replace	$14,047	
	Clubhouse	1501	Carpeting - Replace	$8,897	$22,944
2044	Community Buildings	102	Flat Roofs - Replace	$261,554	
	Common Area	214	Red Curbs / Hydrants - Repaint	$6,331	
	Pool Area	1110	Pool / Waterfall Pumps - Replace	$6,038	$273,924
2045	Community Buildings	202	Trim Surfaces - Repaint	$75,766	
	Common Area	207	Wrought Iron Fencing - Repaint	$40,795	
	Common Area	211	Street Light Fixtures - Repaint	$6,153	
	Clubhouse	705	HVAC Systems - Replace	$33,426	
	Pool Area	1107	Pool Filter - Replace	$4,052	
	Common Area	1609	Street Light Fixtures - Replace/Modify	$25,981	$186,173
2046	Common Area	214	Red Curbs / Hydrants - Repaint	$6,847	
	Common Area	402	Asphalt - Preventative Maintenance	$85,933	
	Clubhouse	1413	Restrooms - Remodel	$22,122	
	Common Area	1812	Landscaping / Irrigation - Renovate	$63,205	$178,108
2047	Common Area	208	Block Walls - Repaint	$72,280	
	Common Area	403	Concrete - Repair/Replace	$14,242	
	Community Buildings	603	Patio Decks - Reseal/Repair	$28,402	
	Pool Area	608	Pool Deck - Seal/Paint/Repair	$7,669	
	Clubhouse	703	Water Heater - Replace	$3,287	
	Clubhouse	803	Mailboxes - Replace	$38,345	
	Pool Area	1101	Pool - Resurface	$41,631	
	Pool Area	1102	Spa - Resurface	$13,147	
	Pool Area	1104	Pool Heater - Replace	$10,956	
	Pool Area	1105	Spa Heater - Replace	$10,956	
	Pool Area	1110	Pool / Waterfall Pumps - Replace	$6,792	
	Pool Area	1121	Pool Furniture - Replace	$17,529	

Projected Expenditures By Year

Year	Subgroup	Comp. Id	Component Name	Projected Cost	Total Per Annum
	Clubhouse	1405	Furniture - Replace	$23,007	
	Clubhouse	1406	Fitness Equipment - Replace	$28,485	$316,727
2048	Community Buildings	201	Stucco Surfaces - Repaint	$350,930	
	Common Area	214	Red Curbs / Hydrants - Repaint	$7,406	
	Common Area	802	Directory - Replace	$5,697	
	Community Buildings	901	Fire Protection System - Renovate	$173,186	
	Pool Area	1304	Drinking Fountain - Replace	$2,848	
	Pool Area	1604	Post Light Fixtures - Replace	$8,887	$548,955
2049	Clubhouse	216	Interior Surfaces - Repaint	$8,295	$8,295
2050	Community Buildings	202	Trim Surfaces - Repaint	$92,180	
	Common Area	207	Wrought Iron Fencing - Repaint	$49,633	
	Common Area	211	Street Light Fixtures - Repaint	$7,487	
	Common Area	214	Red Curbs / Hydrants - Repaint	$8,010	
	Pool Area	1110	Pool / Waterfall Pumps - Replace	$7,641	
	Common Area	1305	Gas Barbecues - Replace	$18,485	
	Community Buildings	1602	Exterior Decorative Light Fixtures - Replace	$56,935	$240,371
2051	Common Area	123	Carport Roofs - Repair	$26,018	
	Common Area	223	Carports - Repaint	$48,222	
	Common Area	402	Asphalt - Preventative Maintenance	$104,551	
	Common Area	1010	Trash Enclosures Gates - Replace	$12,817	
	Pool Area	1108	Spa Filter - Replace	$5,127	
	Pool Area	1390	Outdoor Shower - Re-Tile	$10,253	
	Common Area	1812	Landscaping / Irrigation - Renovate	$76,899	$283,886
2052	Common Area	214	Red Curbs / Hydrants - Repaint	$8,664	
	Community Buildings	603	Patio Decks - Reseal/Repair	$34,556	
	Pool Area	608	Pool Deck - Seal/Paint/Repair	$9,330	
	Common Area	801	Monuments - Refurbish	$21,327	
	Common Area	1002	Wrought Iron Fencing - Partial Repair/Replace	$61,314	
	Pool Area	1102	Spa - Resurface	$15,995	
	Pool Area	1121	Pool Furniture - Replace	$21,327	
	Pool Area	1190	Water Feature - Refurbish	$31,990	$204,503
2053	Pool Area	1110	Pool / Waterfall Pumps - Replace	$8,595	
	Clubhouse	1417	Kitchen - Remodel	$33,270	$41,864
2054	Common Area	214	Red Curbs / Hydrants - Repaint	$9,371	
	Common Area	802	Directory - Replace	$7,208	
	Common Area	1306	Park Furniture - Replace	$28,834	$45,413
2055	Community Buildings	202	Trim Surfaces - Repaint	$112,152	
	Common Area	207	Wrought Iron Fencing - Repaint	$60,386	
	Common Area	211	Street Light Fixtures - Repaint	$9,109	
	Pool Area	1304	Drinking Fountain - Replace	$3,748	$185,395
2056	Common Area	214	Red Curbs / Hydrants - Repaint	$10,136	
	Common Area	402	Asphalt - Preventative Maintenance	$127,202	

Projected Expenditures By Year

Year	Subgroup	Comp. Id	Component Name	Projected Cost	Total Per Annum
	Pool Area	1110	Pool / Waterfall Pumps - Replace	$9,668	
	Community Buildings	1601	Area Light Fixtures - Replace	$72,041	
	Common Area	1812	Landscaping / Irrigation - Renovate	$93,560	$312,606

Glossary of Commonly Used Words and Phrases

(Provided by the National Reserve Study Standards of the Community Associations Institute)

Cash Flow Method - A method of developing a reserve funding plan where contributions to the reserve fund are designed to offset the variable annual expenditures from the reserve fund. Different reserve funding plans are tested against the anticipated schedule of reserve expenses until the desired funding goal is achieved.

Component - Also referred to as an “Asset.” Individual line items in the Reserve Study developed or updated in the physical analysis. These elements form the building blocks for the Reserve Study. Components typically are: 1) Association responsibility, 2) with limited useful life expectancies, 3) have predictable remaining life expectancies, 4) above a minimum threshold cost, and 5) required by local codes.

Component Full Funding - When the actual (or projected) cumulative reserve balance for all components is equal to the fully funded balance.

Component Inventory - The task of selecting and quantifying reserve components. This task can be accomplished through on-site visual observations, review of association design and organizational documents, a review of established association precedents, and discussion with appropriate association representatives.

Deficit - An actual (or projected reserve balance), which is less than the fully funded balance.

Effective Age - The difference between useful life and remaining useful life (UL - RUL).

Financial Analysis - The portion of the Reserve Study where current status of the reserves (measured as cash or percent funded) and a recommended reserve contribution rate (reserve funding plan) are derived, and the projected reserve income and expenses over time is presented. The financial analysis is one of the two parts of the Reserve Study.

Fully Funded Balance - An indicator against which the actual (or projected) reserve balance can be compared. The reserve balance that is in direct proportion to the fraction of life “used up” of the current repair or replacement cost of a reserve component. This number is calculated for each component, and then summed together for an association total.
FFB = Current Cost * Effective Age / Useful Life

Fund Status - The status of the reserve fund as compared to an established benchmark, such as percent funded.

Funding Goals - Independent of calculation methodology utilized, the following represent the basic categories of funding plan goals:

- Baseline Funding: Establishing a reserve-funding goal of keeping the reserve balance above zero.
- Component Full Funding: Setting a reserve funding goal of attaining and maintaining cumulative reserves at or near 100% funded.
- Threshold Funding: Establishing a reserve funding goal of keeping the reserve balance above a specified dollar or percent funded amount.

Funding Plan - An association's plan to provide income to a reserve fund to offset anticipated expenditures from that fund.

Funding Principles -

- Sufficient funds when required
- Stable contributions through the year
- Evenly distributed contributions over the years
- Fiscally responsible

GSF - Gross Square Feet

Life and Valuation Estimates - The task of estimating useful life, remaining useful life, and repair or replacement costs for the reserve components.

LF - Linear Feet

Percent Funded - The ratio, at a particular point in time (typically the beginning of the fiscal year), of the actual (or projected) reserve balance to the ideal fund balance, expressed as a percentage.

Physical Analysis - The portion of the Reserve Study where the component evaluation, condition assessment, and life and valuation estimate tasks are performed. This represents one of the two parts of the Reserve Study.

Remaining Useful Life (RUL) - Also referred to as “remaining life” (RL). The estimated time, in years, that a reserve component can be expected to continue to serve its intended function. Projects anticipated to occur in the current fiscal year have a “0” remaining useful life.

Replacement Cost - The cost of replacing, repairing, or restoring a reserve component to its original functional condition. The current replacement cost would be the cost to replace, repair, or restore the component during that particular year.

Reserve Balance - Actual or projected funds as of a particular point in time (typically the beginning of the fiscal year) that the association has identified for use to defray the future repair or replacement of those major components that the association is obligated to maintain. Also known as “reserves,” “reserve accounts,” or “cash reserves.” In this report the reserve balance is based upon information provided and is not audited.

Reserve Study - A budget-planning tool, which identifies the current status of the reserve fund and a stable and equitable funding plan to offset the anticipated future major common area expenditures. The Reserve Study consists of two parts: The Physical Analysis and the Financial Analysis.

Special Assessment - An assessment levied on the members of an association in addition to regular assessments. Governing documents or local statutes often regulate special assessments.

Surplus - An actual (or projected) reserve balance that is greater than the fully funded balance.

Useful Life (UL) - Also known as “life expectancy.” The estimated time, in years, that a reserve component can be expected to serve its intended function if properly constructed and maintained in its present application of installation.